

UNCLASSIFIED
AD 409 176

DEFENSE DOCUMENTATION CENTER
FOR
SCIENTIFIC AND TECHNICAL INFORMATION
CAMERON STATION ALEXANDRIA VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

CATALOGED BY DDC
AS AD No. 409176

409 176

NOLTR 62-186

A PROBE FOR ELECTRICAL CONDUCTIVITY
MEASUREMENTS IN IONIZED GASES

NOL

31 DECEMBER 1962

UNITED STATES NAVAL ORDNANCE LABORATORY, WHITE OAK, MARYLAND

NOLTR 62-186



UNCLASSIFIED
NOLTR 62-186

Ballistics Research Report 83

A PROBE FOR ELECTRICAL CONDUCTIVITY MEASUREMENTS
IN IONIZED GASES

Prepared by:
Lemmuel L. Hill, Theodore Marshall, and
Benjamin J. Crapo

ABSTRACT: A probe technique for measuring the electrical conductivity in a small region of an ionized flow field is described. The technique involves observing the interaction between an ionized gas and a small perturbing R.F. magnetic field. The probes are basically small coils. Several probes have been dynamically calibrated in a shocktube. A few preliminary measurements were made in the wake of a 4-inch sphere which was subjected to high-speed flight conditions.

PUBLISHED APRIL 1963

U. S. NAVAL ORDNANCE LABORATORY
WHITE OAK, MARYLAND

NOLTR 62-186

31 December 1962

A PROBE FOR ELECTRICAL CONDUCTIVITY MEASUREMENTS
IN IONIZED GASES

This work was sponsored by the Re-Entry Body Section of the Special Projects Office, Bureau of Naval Weapons, under the Applied Research Program in Aeroballistics.

The authors wish to express their appreciation to Messrs. Paul Leath, Robert Gastrock, and Michael Plummer for their valuable contributions to this program. In addition, the authors would like to acknowledge Mr. Joseph J. Lentz for his indispensable aid with the experimental facilities.

R. E. ODENING
Captain, USN
Commander

A. E. Seigel
A. E. SEIGEL
By direction

CONTENTS

	Page
INTRODUCTION	1
THEORY AND APPARATUS	1
CALIBRATION RESULTS.	2
SHOCK-TUNNEL TEST.	3
DISCUSSION	3
REFERENCES	4
APPENDIX A	A-1

ILLUSTRATIONS

Figure	Title
1	Cross-Sectional View of Conductivity Probes
2	Conductivity Probes (Scale in Inches)
3	Conductivity Probe Circuit
4	Schematic Drawing of the 5-in. Shocktube
5	The 5-in. Shocktube
6	Interferometer and Probe Position
7	Calibration Curve for Conductivity Probe Number 1
8	Probe Traces Taken During a Calibration Run
9	Schlieren Photograph and Probe Trace of a Wake Conductivity Test
10	Probe Traces of Two Wake Conductivity Tests, Repeatability is Indicated
11	Core Geometry
12	Probe Coil and Equivalent Circuit for the Condition

INTRODUCTION

During the past few years the U. S. Naval Ordnance Laboratory has become engaged in conducting ionized wake studies in its Hypersonic Shock Tunnel Facilities. The procedure, ideally, was to make a point measurement of the electrical conductivity in the wake of a model which was subjected to high-speed flight conditions. The technique which the authors chose to develop was that of monitoring the interaction between the moving ionized gas and a high-frequency perturbing magnetic field. Since the details of the probing technique have been described in two previous reports (refs. (1) and (2)), only a brief outline will be given below. Although there will be a few minor changes in the probe design and the operating circuitry, this report is of a final nature since the authors feel that the validity of the technique has been adequately demonstrated.

THEORY AND APPARATUS

The probes consist, basically, of small coils embedded in, or wound upon ferrite cores. The ferrite is used primarily to restrict the magnetic field to a particular geometry. Figures 1 and 2 illustrate two probe configurations which are being used.

Figure 3 is a diagram of the probe coil and the associated circuitry. The probe is excited by a one-megacycle, crystal-controlled oscillator which is used in series with a relatively large resistor to obtain a constant current signal. The presence of an ionized gas passing over (or through) the probe coil will cause a change in the impedance of the coil. The potential change across the coil will be equal to the impedance change, since the current is held constant. In this fashion it is easily seen that the effect of the ionized gas is to produce an amplitude modulation of the one-megacycle "carrier." The remainder of the circuit is used to extract the modulation from the carrier. The circuit has an over-all response of 100 kilocycles which means that the change in impedance of the coil due to fluctuations in the ionized flow can be followed with a 10-microsecond response time.

A general theoretical model for the cylindrical probe is presented in reference (1). A more primitive model is presented in reference (2), and for the purpose of continuity is also included as Appendix A of this paper. Both treatments yield a relation between the potential across the probe coil and the electrical conductivity of the ionized gas.

In order that the probing technique not be limited by one's ability to solve accurately the mathematical problem associated with a particular field geometry, it was decided that a dynamic calibration of the probes was necessary. This calibration is accomplished in a specially designed shocktube. This shocktube (described more completely in ref. (2)) was constructed of stainless steel in order to minimize the impurity level. To reduce the boundary layer in the test section, an annular dump region is provided just upstream of the testing region (see figs. 4 and 5). The probe is mounted on a sting just downstream of a 70 Kmc microwave interferometer which is used to obtain the electron density of the ionized air (see fig. 6). A range of conditions for the shock-heated air was obtained by varying the initial pressure and shock velocity.

CALIBRATION RESULTS

Several of the wedge-type probes have been calibrated in the manner described above. Due to an oversight on the authors' part the wedge angle was too large and a detached shock was incurred. Since the microwave interferometer measures the electron density in the free stream, it is difficult to use this value to determine conditions behind the standing shock. The authors thus chose to calculate the electrical conductivity, in a fashion used by Dr. Lin in reference (3), using initial pressure and shock velocity as a starting point. The temperature and density ratios across the standing shock were obtained from reference (4), the particle densities from reference (5), and the collision cross sections from reference (6). Figure 7 is a typical calibration curve for one of the wedge-type probes. The vertical scale (probe signal) is the amplitude of the signal as displayed on the oscilloscope. Some of the scatter of the data points is attributed to fluctuations in the standing shockwave which will amplify any flow irregularities.

The new generation of probes will have a wedge angle sufficiently small to insure an attached shock below the probe. Since the probe will then be sensing the free-stream region, a direct comparison with the interferometer will be possible. Figure 8 is a selection of traces from the calibration run on one of the probes. The oscilloscope is triggered about 100 microseconds before the shock arrives at the probe position. There is an anomalous spike, which occurs during this 100 microseconds, which the authors are unable to explain. The extra marks on the photographs were made by the authors when reading the data. A large percent of the irregularities and over-all slantedness of the traces is attributed to noise.

SHOCK-TUNNEL TEST

Several test shots were made in the 1.5-in. Hypersonic Shock Tunnel No. 1 to see whether a measurement could be performed with the conductivity probe. The probe was placed in the wake of a 4-inch sphere (see fig. 9). Since only qualitative results were sought from these initial tests, no attempt was made to align the probe with the flow streamlines.

Figure 9 is a probe trace and a schlieren photograph of a typical shot. The fact that the probe is not aligned with a streamline is confirmed by an attached shockwave on top of the wedge. The sphere was flying at simulated conditions of Mach 8 at an altitude of 125,000 feet.

Figure 10 displays two probe traces from two different shots. The flight conditions for the sphere were Mach 8 at an altitude of 50,000 feet for both shots. Repeatability is indicated. The excessive noise on the upper trace was due to a loose cable cover plate inside the tunnel which was discovered after the shot.

The flow duration indicated on the probe traces in figures 9 and 10 checks very closely with those predicted from aerodynamic calculations.


DISCUSSION

The lower limit of sensitivity of the probes described above is about 10^{-4} mhos/cm. This limit is set, basically, by the signal-to-noise ratio (i.e., a signal representing 10^{-4} mhos/cm represents a modulation of only about .02 percent). There is no upper limit of sensitivity. It is, however, very difficult to distinguish between 10^5 and 10^6 mhos/cm since both yield about 100 percent modulation on the carrier.


As soon as the new generation of probes has been calibrated, the probes will be used to determine the radial and axial variation of the electrical conductivity in the wake of various models at various flight conditions. It is also anticipated that coils will be embedded in the models themselves so that the conductivity of the ionized gas surrounding the model can be determined.

REFERENCES

1. Marshall, T. and Hill, L. L., "An R.F. Technique for Determining the Electrical Conductivity of an Ionized Gas in a Flow Field," NavOrd Report 6878 (1961)
2. Marshall, T., Hill, L. L. and Crapo, B. J., "Radio-Frequency Probes for Ionized Wake Studies," NOLTR 62-64 (in publication)
3. Lamb, L. and Lin, S. C., "Electrical Conductivity of Thermally Ionized Air Produced in a Shock Tube," Journal of Applied Physics, Vol. 28, 754 (1957)
4. Feldman, S., "Hypersonic Gas Dynamic Charts for Equilibrium Air," AVCO Research Laboratory Report, Jan 1957
5. Hilsenrath, J. and Beckett, C. W., National Bureau of Standards Report 3991 (1955)
6. Massey, H. S. W. and Burhop, E. H. S., Electronic and Ionic Impact Phenomena (Oxford University Press, New York, 1952)

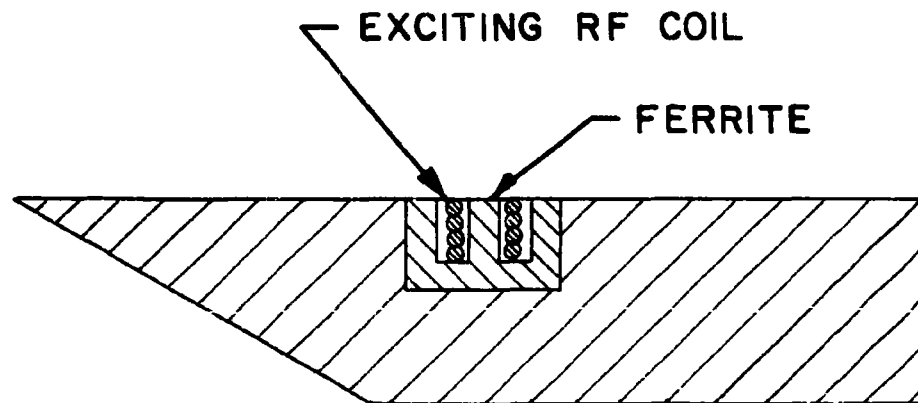

FLAT PLATE RF-PROBE

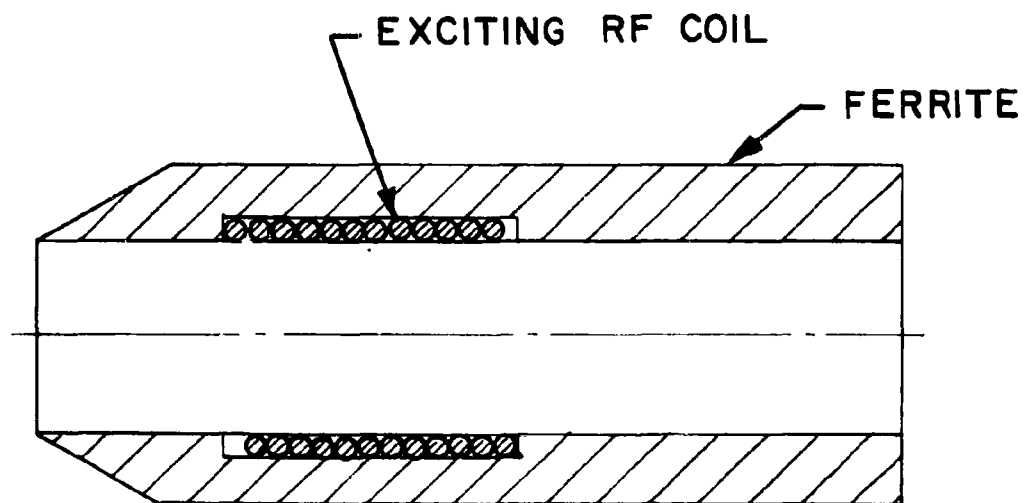

CYLINDRICAL RF-PROBE

FIG. 1 CROSS-SECTIONAL VIEW OF CONDUCTIVITY PROBES

NOLTR 62-186

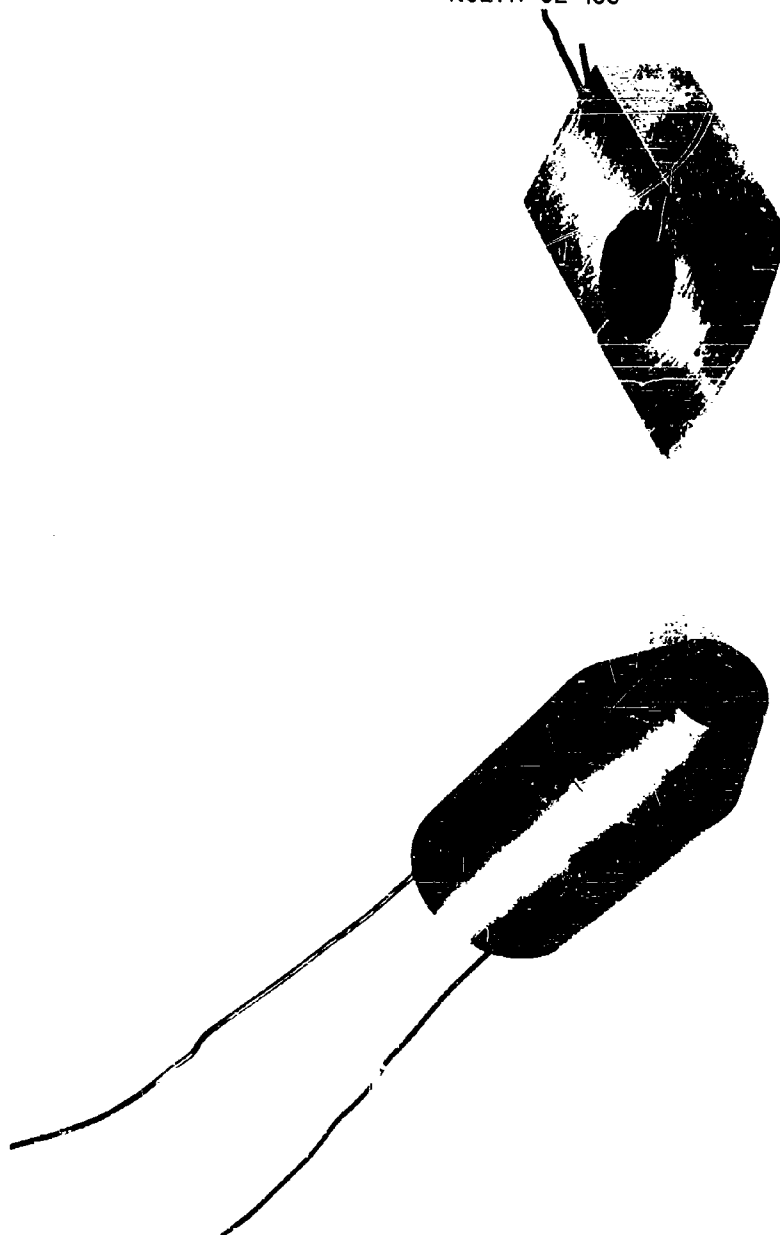


FIG. 2 CONDUCTIVITY PROBES (SCALE IN INCHES)

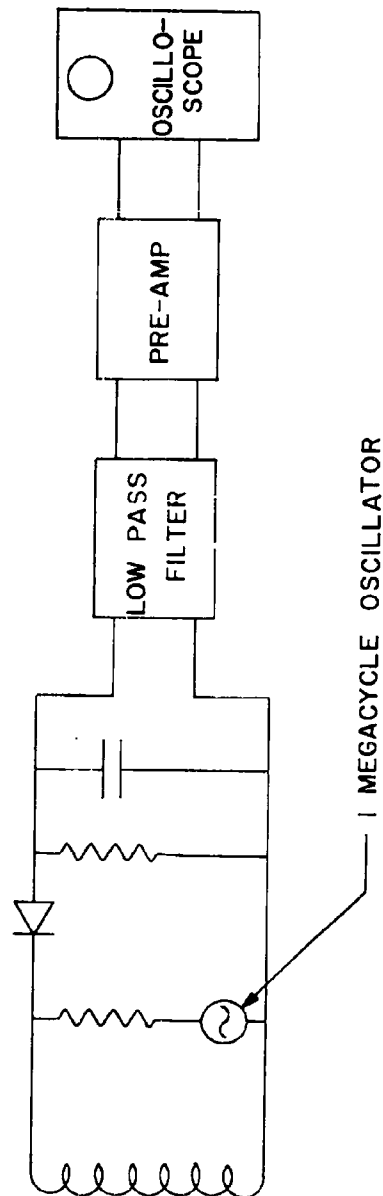


FIG. 3 CONDUCTIVITY PROBE CIRCUIT.

NOLTR 62-186

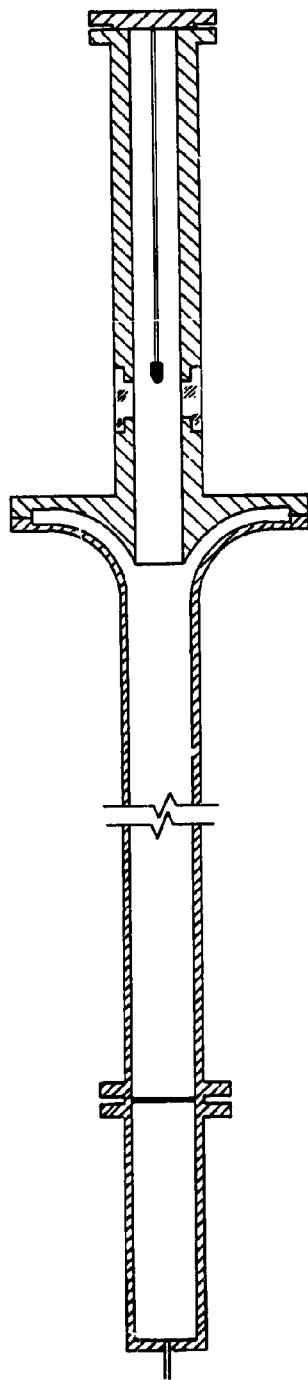


FIG. 4 SCHEMATIC DRAWING OF THE 5-IN. SHOCKTUBE.



FIG. 5 THE 5-IN. SHOCKTUBE

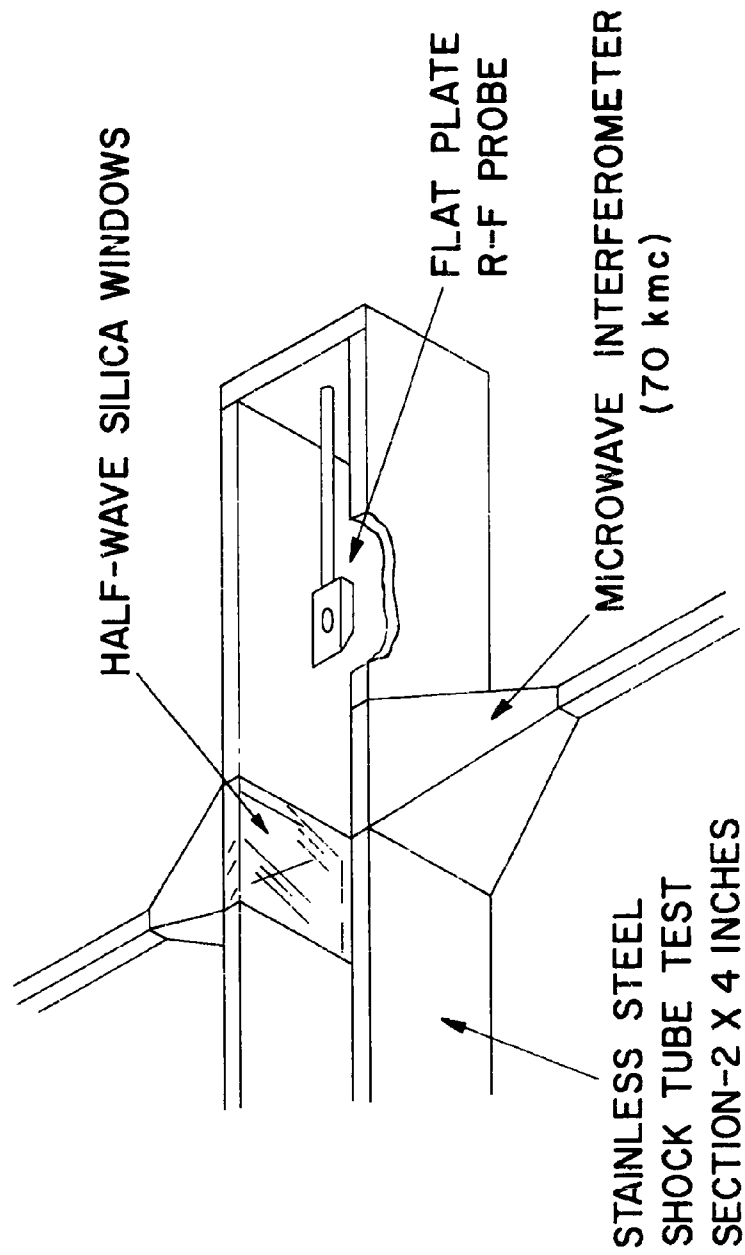


FIG. 6 INTERFEROMETER AND PROBE POSITION.


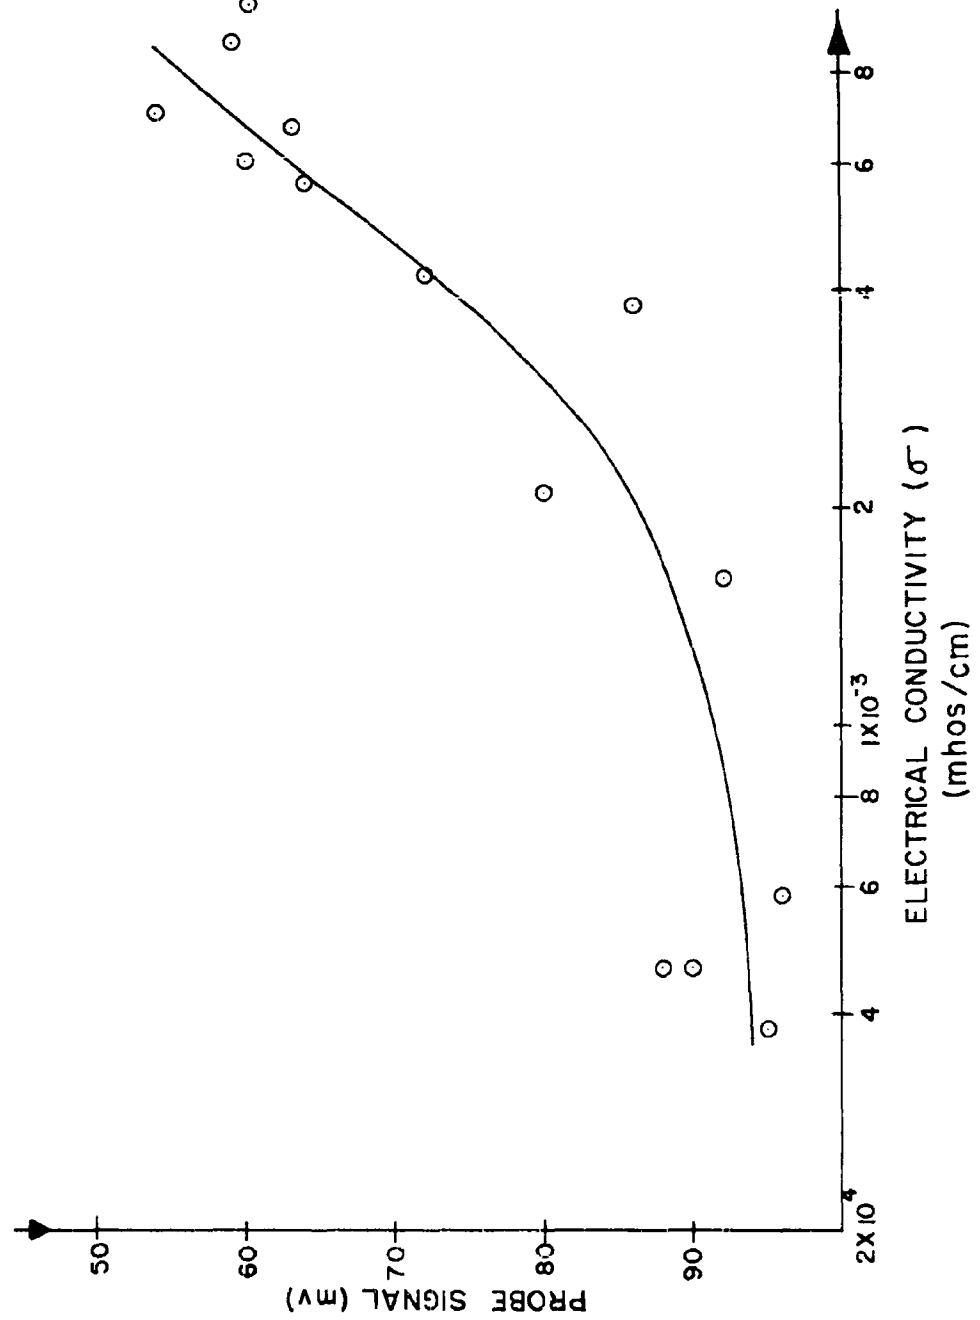


FIG. 7 CALIBRATION CURVE FOR CONDUCTIVITY PROBE NUMBER 1


NOLTR -186

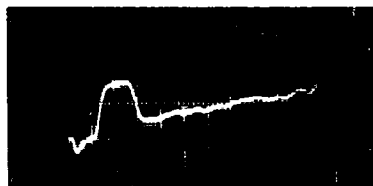

SHOT # 229

$P_i = 0.1$ torr

$M_s = 12.2$

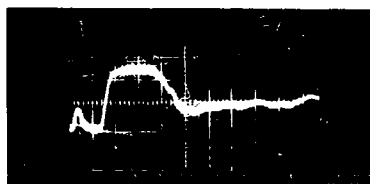

SHOT # 230

$P_i = 1.0$ torr


$M_s = 9.3$



SHOT # 236

$P_i = 5.0$ torr

$M_s = 9.2$

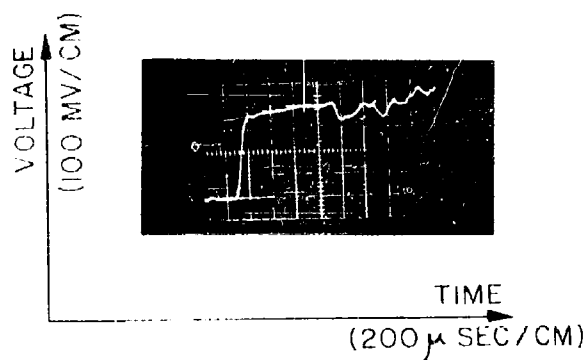

SHOT # 237

$P_i = 7.0$ torr

$M_s = 9.0$

FIG. 8 PROBE TRACES TAKEN DURING A CALIBRATION RUN.

NOLTR 62-186

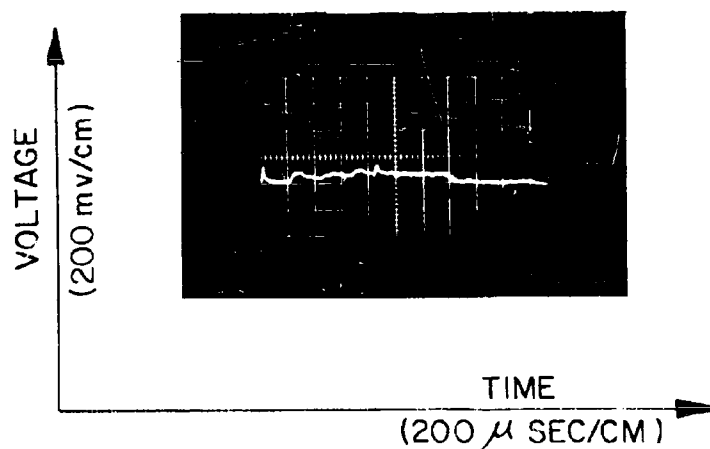
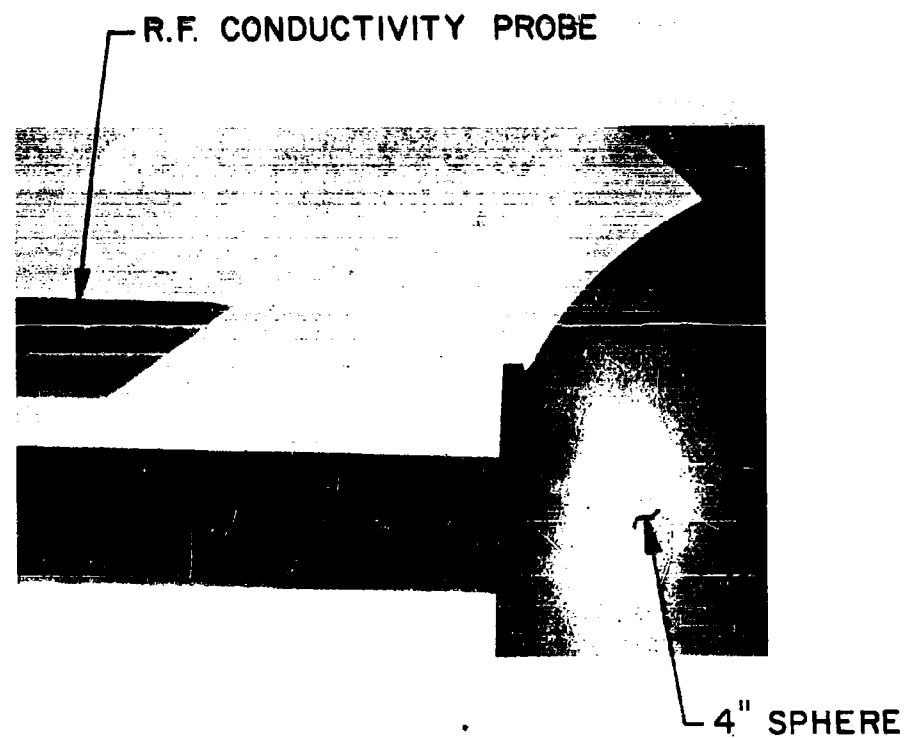


FIG. 9 SCHLIEREN PHOTOGRAPH AND PROBE TRACE OF A WAKE CONDUCTIVITY TEST

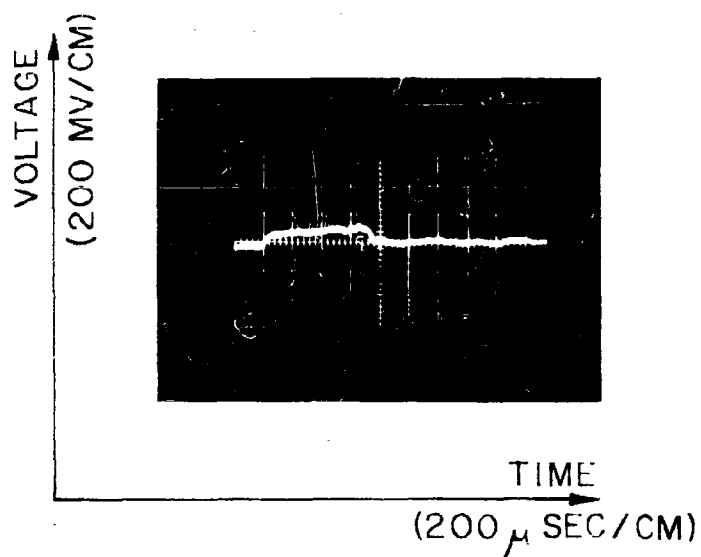
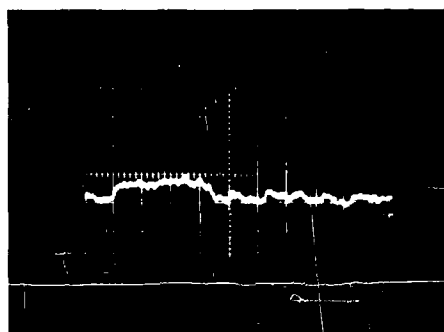


FIG. 10 PROBE TRACES OF TWO WAKE CONDUCTIVITY TESTS, REPEATABILITY IS INDICATED.

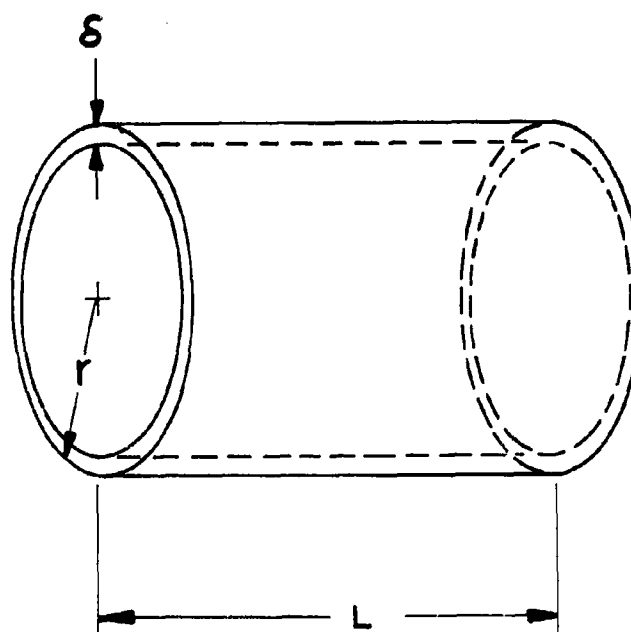


FIG. II CORE GEOMETRY

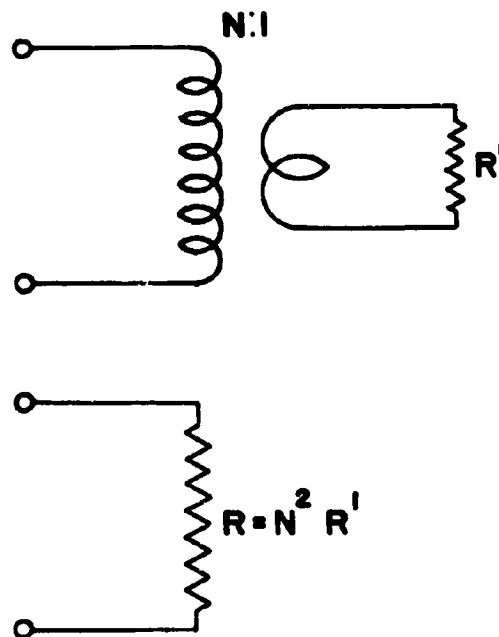
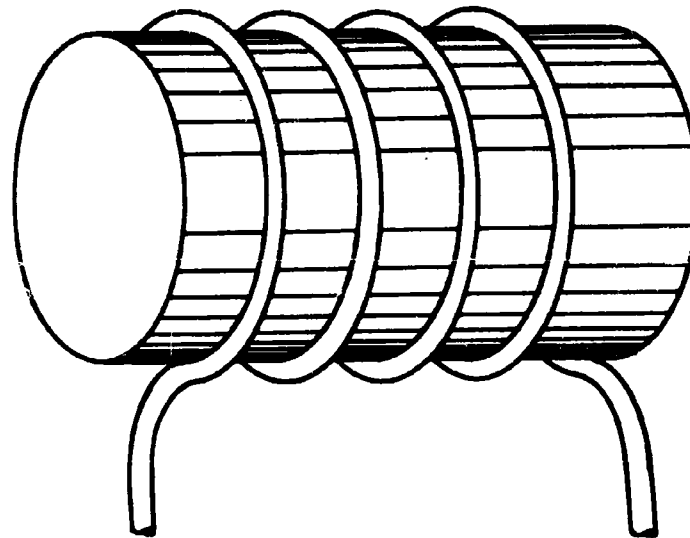


FIG. 12 PROBE COIL AND EQUIVALENT
CIRCUIT FOR THE CONDITION.

APPENDIX A

A detailed calculation relating the impedance of a solenoid as a function of the excitation frequency f and the electrical conductivity σ of the core is given in reference (2). Rather than repeating this information, it is instructive to consider the special case when the product $f\sigma$ is sufficiently large that the skin depth of field penetration δ is small compared to the core radius r (see fig. 9). It is further assumed that although the gas is in motion, the frequency is high enough to effectively stop this motion. Since the field penetration is small compared to the radius, one can consider that the induced current flows in the thin cylindrical shell of width δ . The resistance R' of this shell is given by

$$R' = \frac{2\pi r}{\sigma L \delta} \quad (A1)$$

where $2\pi r$ is the length of the current path, $L\delta$ is the cross-sectional area, and σ is the electrical conductivity. Since the skin depth is given by

$$\delta = (\pi f \mu \sigma)^{-1/2} \quad (A2)$$

equation (A1) becomes

$$R' = \frac{2\pi r}{L} \left(\frac{\pi f}{\sigma} \right)^{1/2} \quad (A3)$$

The geometry of this shell in relation to the excitation coil suggests that one can make use of a transformer analog, where the ionized gas is represented by a one-turn secondary with a load impedance R' (see fig. 10). A convenient equivalent circuit for the transformer is simply an impedance equal to the load impedance times the turns ratio squared. The probe impedance is thus

$$R = N^2 \frac{2\pi r}{L} \left(\frac{\pi f}{\sigma} \right)^{1/2} \quad (A4)$$

Since the current I is held constant the magnitude of the potential across the coil V is given by

$$|V| = IN^2 \frac{2\pi\gamma}{L} \left(\frac{\pi f}{\sigma} \right)^{1/2} \quad (A5)$$

Equation (A4) is found to be fairly accurate for skin depths as large as 0.3γ . The more general result derived in reference (1) makes no assumptions of f or σ .

NOLTR 62-186

Distribution

	<u>Copies</u>
Chief, Bureau of Naval Weapons Department of the Navy Washington 25, D. C. Attn: RMMO	1
Attn: RMGA	1
Attn: RRMA	1
Director, Special Projects Department of the Navy Washington 25, D. C. Attn: SP-20	4
Attn: SP-27	2
Attn: SP-272	1
Office of Naval Research Room 2709 - T-3 Washington 25, D. D. Attn: Head, Mechanics Br.	1
Commanding Officer Office of Naval Research Branch Office, Box 39, Navy 100 Fleet Post Office, New York, N. Y.	5
Director, DTMB Aerodynamics Laboratory Washington 7, D. C. Attn: Library	1
Naval Weapons Laboratory Dahlgren, Va. Attn: Library	1
Commander U. S. Naval Ordnance Test Station China Lake, Calif. Attn: Technical Library	1
Director Naval Research Laboratory Washington 25, D. C. Attn: Code 2027	1
Attn: Mr. Edward Chapin, Code 6310	1

	<u>Copies</u>
Director of Intelligence Headquarters, USAF Washington 25, D. C. Attn: AFOIN-3B	1
Commander Aeronautical Systems Division Wright-Patterson Air Force Base, Ohio Attn: WCOSI-3 Attn: WCLSW-5 Attn: WCRRD Attn: Melvin L. Buck (ASRMDF-2)	1 1 1 1
Commander, AFBMD Air Res. & Develop. Command P. O. Box 262 Inglewood, Calif. Attn: WDTLAR	1
Chief, DASA The Pentagon Washington, D. C. Attn: Document Library	1
Headquarters Arnold Engineering Development Center (ARDC) U. S. Air Force Arnold Air Force Station, Tennessee Attn: Technical Library Attn: AEOR	1 1
Commanding Officer, DOFL Washington 25, D. C. Attn: Library Rm. 211, Bldg. 92	1
NASA George C. Marshall Space Flight Center Huntsville, Alabama Attn: M-S&M-PT (Mr. H. A. Connell) Attn: Dr. W. R. Lucas (M-SFM-M) Attn: Dr. Ernst Geissler	2 1 1
Office, Chief of Ordnance Department of the Army Washington 25, D. C. Attn: ORDTU	1

	<u>Copies</u>
NASA High Speed Flight Station Edwards Field, Calif. Attn: W. C. Williams	1
Aerospace Corporation El Segundo, Calif. Attn: Dr. Bitondo	1
Lockheed Aircraft Corp. Missiles and Space Div. P. O. Box 504 Sunnyvale, Calif. Attn: Dr. L. H. Wilson	1
Lockheed Aircraft Corp. Research Lab. Palo Alto, California Attn: W. Griffith	1
Atomic Energy Commission Engineering Development Branch Division of Reactor Development Headquarters, US AEC Washington 25, D. C. Attn: Mr. J. M. Simmons Attn: Mr. M. J. Whitman Attn: Mr. J. Conners	1 1 1
University of California Lawrence Radiation Laboratory P. O. Box 808 Livermore, Calif. Attn: Mr. W. M. Wells, Propulsion Div. Attn: Mr. Carl Kline	1 1
Oak Ridge National Laboratory P. O. Box E Oak Ridge, Tenn. Attn: Mr. W. D. Manly	1
General Applied Sciences Laboratories, Inc. Merrick and Stewart Avenues East Meadow, New York Attn: Mr. Robert Byrne	1

NOLTR 62-186

	<u>Copies</u>
Commanding General	
Aberdeen Proving Ground, Md.	
Attn: Technical Info. Br.	1
Attn: Ballistics Research Laboratories	1
APL/JHU	
8621 Georgia Ave.	
Silver Spring, Md.	
Attn: Tech. Reports Group	2
Attn: Dr. D. Fox	1
Attn: Dr. Freeman Hill	1
Attn: Dr. L. L. Cronvich	1
Attn: Librarian	1
AVCO Manufacturing Corp.	
Research & Advanced Development Div.	
201 Lowell Street	
Wilmington, Mass.	
Attn: Dr. B. D. Henschel, Aerodynamics Section	1
AVCO Manufacturing Corp.	
Everett, Mass.	
Attn: Dr. Kantrowitz	1
General Electric Co.	
Space Vehicle & Missiles Dept.	
21 South 12th St.	
Philadelphia, Penn.	
Attn: Dr. J. Stewart	1
Attn: Dr. Otto Klima	1
Attn: Mr. E. J. Nolan	1
Attn: Mr. L. McCreight	1
General Electric, Research Lab.	
3198 Chestnut St.	
Philadelphia, Penn.	
Attn: Dr. Leo Steg	1
General Electric Co.	
Missile and Space Vehicle Dept.	
3198 Chestnut St.	
Philadelphia, Penn.	
Attn: Jerome Persh	1
National Aeronautics and Space Admin.	
1520 H Street, N. W.	
Washington, D. C.	5

	<u>Copies</u>
BSD(BSRP)	
A. F. Unit Post Office	
Los Angeles 45, Calif.	2
NASA	
Langley Research Center	
Langley Field, Va.	
Attn: Librarian	1
Attn: C. H. McLellan	1
Attn: J. J. Stack	1
Attn: Adolf Busemann	1
Attn: Rodger W. Peters (Structures Res. Div.)	1
Attn: Russell Hopko, PARD	1
NASA	
Ames Research Center	
Moffett Field, Calif.	
Attn: Librarian	1
NASA	
Lewis Research Center	
21000 Brookpark Rd.	
Cleveland, Ohio	
Attn: Chief, Propulsion Aerodynamics Div.	1
Attn: Mr. George Mandel, Chief, Library	2
Office of the Assistant	
Secretary of Defense (R&D)	
Room 3E1041, The Pentagon	
Washington 25, D. C.	
Attn: Library (Technical)	1
Research and Development Board	
Room 3D1041, The Pentagon	
Washington 25, D. C.	
Attn: Library	2
ASTIA	
Arlington Hall Station	
Arlington 12, Va.	
Attn: TIPDR	10
Commander, Pacific Missile Range	
Point Mugu, Calif.	
Attn: Technical Library	1

Copies

Jet Propulsion Laboratory 4800 Oak Grove Drive Pasadena 3, Calif. Attn: I. R. Kowlan, Chief, Reports Group Attn: Dr. L. Jaffee	1 2
Los Alamos Scientific Laboratory P. O. Box 1663 Los Alamos, New Mexico Attn: Dr. Donald F. MacMillan N-1 Group Leader	1
Institute for Defense Analyses Advanced Research Projects Agency Washington 25, D. C. Attn: W. G. May General Sciences Branch	1
Kaman Aircraft Corporation Nuclear Division Colorado Springs, Colorado Attn: Dr. A. P. Bridges	1
U. S. Atomic Energy Commission P. O. Box 62 Oak Ridge, Tennessee Attn: TRI:NLP:ATD:10-7	1
Sandia Corporation Livermore Laboratory P. O. Box 969 Livermore, Calif.	1
United Aircraft Corporation Research Laboratories East Hartford 8, Conn. Attn: Mr. H. J. Charette Attn: Mr. H. Taylor	1 1
Sandia Corporation Sandia Base Albuquerque, N. Mexico Attn: Mr. Alan Pope	1
Defense Metals Information Center Battelle Memorial Institute 505 King Avenue Columbus 1, Ohio	1

	<u>Copies</u>
Commanding General Army Rocket and Guided Missile Agency Redstone Arsenal, Alabama Attn: John Morrow	1
National Bureau of Standards Washington 25, D. C. Attn: Dr. Galen B. Schubauer	1
Cornell Aeronautical Laboratory 4455 Genesee Street Buffalo, N. Y. Attn: Dr. Gordon Hall	1
Dept. of Mechanical Engineering University of Delaware Newark, Delaware Attn: Dr. James P. Hartnett	1

CATALOGING INFORMATION FOR LIBRARY USE

BIBLIOGRAPHIC INFORMATION					
SOURCE	DESCRIPTORS	CODES	SECURITY CLASSIFICATION AND CODE COUNT	DESCRIPTORS	CODES
	NOL technical report	NOLTR		Unclassified - 16	U016
REPORT NUMBER	62-186	620186	CIRCULATION LIMITATION		
REPORT DATE	31 Dec. 1962	1262	CIRCULATION LIMITATION OR BIBLIOGRAPHIC		
			BIBLIOGRAPHIC (SUPPL., VOL., ETC.)		

SUBJECT ANALYSIS OF REPORT					
DESCRIPTORS	CODES	DESCRIPTORS	CODES	DESCRIPTORS	CODES
Probes	PROB	Equation	EQUA		
Measuring	MEAU	Interferometer	INFM		
Electrical	ELEC	Radio frequency	RADF		
Conductivity	COND	Magnetic field	MAGI		
Ionized	IONI				
Gases	GASE				
Flow	FLOW				
Fields	FIEL				
Wake	WAKE				
Probe (Design)	PROBD				
Dynamic	DYNA				
Calibration	CALB				

Naval Ordnance Laboratory, White Oak, Md.
(NOL technical report 62-186)
A PROBE FOR ELECTRICAL CONDUCTIVITY MEASUREMENTS IN IONIZED GASES (U), by Lemuel L. Hill and others. 31 Dec. 1962. v.p. illus., diagr. (Ballistics research report 83)

1. Probes, Electrical
2. Flow fields
3. Gases, Ionized
4. Probes - Flow
- I. Title
- II. Hill, Lemuel L.
- III. Series

UNCLASSIFIED
A probe technique for measuring the electrical conductivity in a small region of an ionized flow field is described. The technique involves observing the interaction between an ionized gas and a small perturbing R. F. magnetic field. The probes are basically small coils. Several probes have been dynamically calibrated in a shocktube. A few preliminary measurements were made in the wake of a 4-inch sphere which was subjected to high-speed flight conditions.

Abstract card is unclassified.

Naval Ordnance Laboratory, White Oak, Md.
(NOL technical report 62-186)
A PROBE FOR ELECTRICAL CONDUCTIVITY MEASUREMENTS IN IONIZED GASES (U), by Lemuel L. Hill and others. 31 Dec. 1962. v.p. illus., diagr. (Ballistics research report 83)

1. Probes, Electrical
2. Flow fields
3. Gases, Ionized
4. Probes - Flow
- I. Title
- II. Hill, Lemuel L.
- III. Series

UNCLASSIFIED
A probe technique for measuring the electrical conductivity in a small region of an ionized flow field is described. The technique involves observing the interaction between an ionized gas and a small perturbing R. F. magnetic field. The probes are basically small coils. Several probes have been dynamically calibrated in a shocktube. A few preliminary measurements were made in the wake of a 4-inch sphere which was subjected to high-speed flight conditions.

Abstract card is unclassified.

Naval Ordnance Laboratory, White Oak, Md.
(NOL technical report 62-186)
A PROBE FOR ELECTRICAL CONDUCTIVITY MEASUREMENTS IN IONIZED GASES (U), by Lemuel L. Hill and others. 31 Dec. 1962. v.p. illus., diagr. (Ballistics research report 83)

1. Probes, Electrical
2. Flow fields
3. Gases, Ionized
4. Probes - Flow
- I. Title
- II. Hill, Lemuel L.
- III. Series

UNCLASSIFIED
A probe technique for measuring the electrical conductivity in a small region of an ionized flow field is described. The technique involves observing the interaction between an ionized gas and a small perturbing R. F. magnetic field. The probes are basically small coils. Several probes have been dynamically calibrated in a shocktube. A few preliminary measurements were made in the wake of a 4-inch sphere which was subjected to high-speed flight conditions.

Abstract card is unclassified.

Naval Ordnance Laboratory, White Oak, Md.
(NOL technical report 62-186)
A PROBE FOR ELECTRICAL CONDUCTIVITY MEASUREMENTS IN IONIZED GASES (U), by Lemuel L. Hill and others. 31 Dec. 1962. v.p. illus., diagr. (Ballistics research report 83)

1. Probes, Electrical
2. Flow fields
3. Gases, Ionized
4. Probes - Flow
- I. Title
- II. Hill, Lemuel L.
- III. Series

UNCLASSIFIED
A probe technique for measuring the electrical conductivity in a small region of an ionized flow field is described. The technique involves observing the interaction between an ionized gas and a small perturbing R. F. magnetic field. The probes are basically small coils. Several probes have been dynamically calibrated in a shocktube. A few preliminary measurements were made in the wake of a 4-inch sphere which was subjected to high-speed flight conditions.

Abstract card is unclassified.

Naval Ordnance Laboratory, White Oak, Md.
(NOL technical report 62-186)
A PROBE FOR ELECTRICAL CONDUCTIVITY MEASUREMENTS IN IONIZED GASES (U), by Lemuel L. Hill and others. 31 Dec. 1962. v.p. illus., diagr. (Ballistics research report 83)

UNCLASSIFIED
A probe technique for measuring the electrical conductivity in a small region of an ionized flow field is described. The technique involves observing the interaction between an ionized gas and a small perturbing R. F. magnetic field. The probes are basically small coils. Several probes have been dynamically calibrated in a shocktube. A few preliminary measurements were made in the wake of a 4-inch sphere which was subjected to high-speed flight conditions.

Abstract card is unclassified.

1. Probes, Electrical
2. Flow fields
3. Gases, Ionized
4. Probes - Flow

I. Title
II. Hill, Lemuel L.
III. Series

Naval Ordnance Laboratory, White Oak, Md.
(NOL technical report 62-186)
A PROBE FOR ELECTRICAL CONDUCTIVITY MEASUREMENTS IN IONIZED GASES (U), by Lemuel L. Hill and others. 31 Dec. 1962. v.p. illus., diagr. (Ballistics research report 83)

UNCLASSIFIED
A probe technique for measuring the electrical conductivity in a small region of an ionized flow field is described. The technique involves observing the interaction between an ionized gas and a small perturbing R. F. magnetic field. The probes are basically small coils. Several probes have been dynamically calibrated in a shocktube. A few preliminary measurements were made in the wake of a 4-inch sphere which was subjected to high-speed flight conditions.

Abstract card is unclassified.

1. Probes, Electrical
2. Flow fields
3. Gases, Ionized
4. Probes - Flow

I. Title
II. Hill, Lemuel L.
III. Series

Naval Ordnance Laboratory, White Oak, Md.
(NOL technical report 62-186)
A PROBE FOR ELECTRICAL CONDUCTIVITY MEASUREMENTS IN IONIZED GASES (U), by Lemuel L. Hill and others. 31 Dec. 1962. v.p. illus., diagr. (Ballistics research report 83)

UNCLASSIFIED
A probe technique for measuring the electrical conductivity in a small region of an ionized flow field is described. The technique involves observing the interaction between an ionized gas and a small perturbing R. F. magnetic field. The probes are basically small coils. Several probes have been dynamically calibrated in a shocktube. A few preliminary measurements were made in the wake of a 4-inch sphere which was subjected to high-speed flight conditions.

Abstract card is unclassified.

1. Probes, Electrical
2. Flow fields
3. Gases, Ionized
4. Probes - Flow

I. Title
II. Hill, Lemuel L.
III. Series

Naval Ordnance Laboratory, White Oak, Md.
(NOL technical report 62-186)
A PROBE FOR ELECTRICAL CONDUCTIVITY MEASUREMENTS IN IONIZED GASES (U), by Lemuel L. Hill and others. 31 Dec. 1962. v.p. illus., diagr. (Ballistics research report 83)

UNCLASSIFIED
A probe technique for measuring the electrical conductivity in a small region of an ionized flow field is described. The technique involves observing the interaction between an ionized gas and a small perturbing R. F. magnetic field. The probes are basically small coils. Several probes have been dynamically calibrated in a shocktube. A few preliminary measurements were made in the wake of a 4-inch sphere which was subjected to high-speed flight conditions.

Abstract card is unclassified.

1. Probes, Electrical
2. Flow fields
3. Gases, Ionized
4. Probes - Flow

I. Title
II. Hill, Lemuel L.
III. Series